



SLA9-12 (12V9.0Ah)

SLA series is a general purpose battery with 5 years design life in float service. It meets with IEC and JIS standards. With up-dated AGM valve regulated technology and high purity raw materials, the SLA series battery has reliable standby service life. It is suitable for UPS/EPS, medical equipment, emergency light and security systems applications.



Specification

| | |
|--------------------------------------|---|
| Cells Per Unit | 6 |
| Voltage Per Unit | 12 |
| Capacity | 9.0Ah@20hr-rate to 1.75V per cell @25 C ° |
| Weight | Approx. 2.55Kg (Tolerance ±4%) |
| Max. Discharge Current | 90 A (5 sec) |
| Internal Resistance | Approx. 18 mΩ |
| Operating Temperature Range | Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C |
| Normal Operating Temperature Range | 25°C ± 5°C |
| Float charging Voltage | 13.7 to 13.9 VDC/unit Average at 25°C |
| Recommended Maximum Charging Current | 2.7 A |
| Equalization and Cycle Service | 14.6 to 14.8 VDC/unit Average at 25°C |
| Self Discharge | VMF Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using. |
| Terminal | Faston Tab 187(F1)/Faston tab 250(F2) |
| Constrainer Material | A.B.S. UL94-HB, UL94-V0 Optional. |



MH28539



G4M20206-0910-E-16



THE INTERNATIONAL CERTIFICATION NETWORK

CERTIFICATE

Postcode: 421001

is in conformity with

ISO 14001:2004 Standard



THE INTERNATIONAL CERTIFICATION NETWORK

CERTIFICATE


Postcode: 421001

is in conformity with

OHSAS 18001:1999 Standard



Dimensions

Unit: mm Dimension: 151(L) × 65(W) × 100(H)

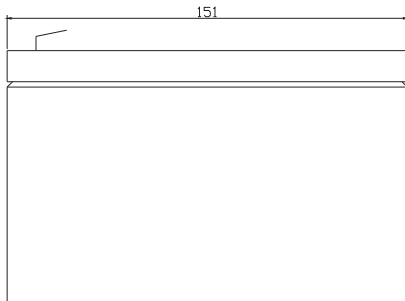

Terminal F1

Terminal F2

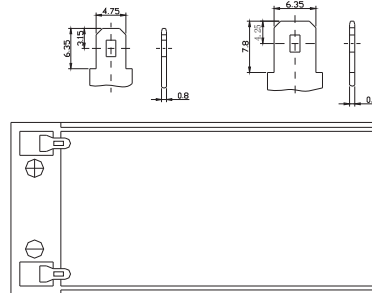

Constant Current Discharge Characteristics : A(25°C)


| F.V/Time | 5MIN | 10MIN | 15MIN | 30MIN | 1HR | 2HR | 3HR | 4HR | 5HR | 8HR | 10HR | 20HR |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 9.60V | 35.50 | 23.27 | 17.33 | 9.23 | 5.849 | 3.362 | 2.357 | 1.920 | 1.578 | 1.039 | 0.900 | 0.482 |
| 10.0V | 34.22 | 22.69 | 16.78 | 9.11 | 5.772 | 3.294 | 2.313 | 1.892 | 1.564 | 1.035 | 0.890 | 0.478 |
| 10.2V | 32.20 | 21.57 | 16.31 | 8.97 | 5.717 | 3.259 | 2.293 | 1.874 | 1.553 | 1.026 | 0.877 | 0.464 |
| 10.5V | 28.95 | 20.17 | 15.39 | 8.722 | 5.646 | 3.217 | 2.272 | 1.846 | 1.540 | 1.017 | 0.872 | 0.454 |
| 10.8V | 25.94 | 18.81 | 14.52 | 8.434 | 5.568 | 3.190 | 2.246 | 1.783 | 1.533 | 1.012 | 0.858 | 0.436 |
| 11.1V | 22.69 | 17.24 | 13.39 | 8.114 | 5.436 | 3.127 | 2.202 | 1.757 | 1.526 | 1.004 | 0.845 | 0.429 |

Constant Power Discharge Characteristics : W(25°C)


| F.V/Time | 5MIN | 10MIN | 15MIN | 30MIN | 1HR | 2HR | 3HR | 4HR | 5HR | 8HR | 10HR | 20HR |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 9.60V | 385.0 | 255.2 | 191.3 | 105.6 | 69.92 | 39.62 | 28.18 | 22.98 | 18.90 | 12.44 | 10.78 | 5.779 |
| 10.0V | 375.0 | 249.9 | 188.5 | 104.5 | 68.90 | 39.10 | 27.72 | 22.65 | 18.73 | 12.40 | 10.68 | 5.732 |
| 10.2V | 356.7 | 240.0 | 186.0 | 103.6 | 68.39 | 38.75 | 27.48 | 22.44 | 18.62 | 12.30 | 10.54 | 5.584 |
| 10.5V | 325.5 | 230.1 | 176.3 | 101.5 | 67.47 | 38.34 | 27.28 | 22.14 | 18.47 | 12.20 | 10.47 | 5.490 |
| 10.8V | 293.7 | 215.3 | 166.6 | 99.1 | 66.59 | 38.06 | 26.96 | 21.39 | 18.38 | 12.14 | 10.31 | 5.270 |
| 11.1V | 259.0 | 200.4 | 156.9 | 96.4 | 65.13 | 37.51 | 26.43 | 21.09 | 18.32 | 12.06 | 10.15 | 5.187 |

All mentioned values are average values (Tolerance ±2%).


Effect of temperature on long term float life

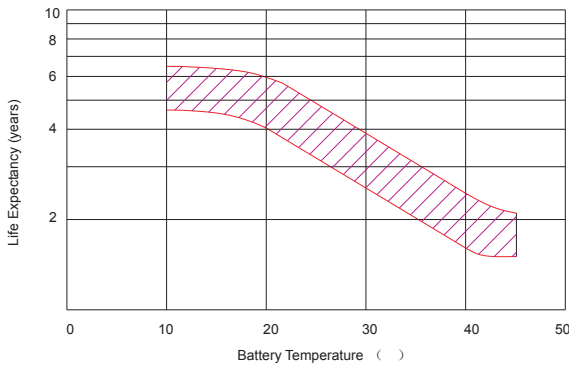


Storage characteristic

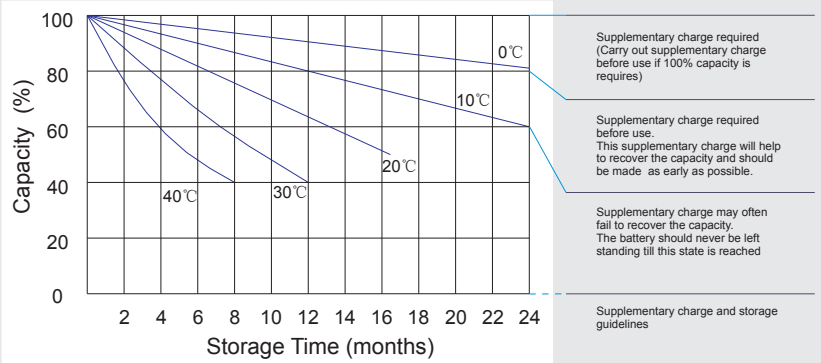

Charge characteristic Curve for standby use

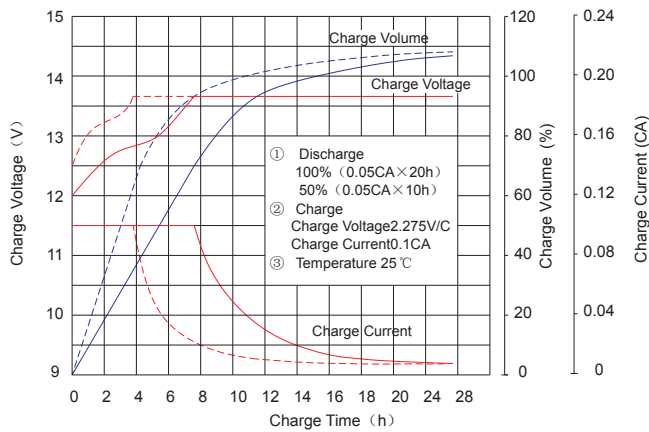

Discharge characteristic Curve

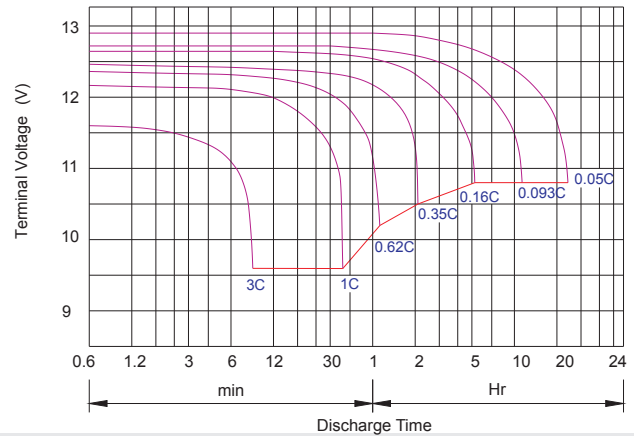

Capacity Factors With Different Temperature

| BatteryType | | -20°C | -10°C | 0°C | 5°C | 10°C | 20°C | 25°C | 30°C | 40°C | 45°C |
|-------------|--------|-------|-------|-----|-----|------|------|------|------|------|------|
| GEL Battery | 6V&12V | 50% | 70% | 83% | 85% | 90% | 98% | 100% | 102% | 104% | 105% |
| | 2V | 60% | 75% | 85% | 88% | 92% | 99% | 100% | 103% | 105% | 106% |
| AGM Battery | 6V&12V | 46% | 66% | 76% | 83% | 90% | 98% | 100% | 103% | 107% | 109% |
| | 2V | 55% | 70% | 80% | 85% | 92% | 99% | 100% | 104% | 108% | 110% |

Discharge Current VS. Discharge Voltage

| Final Discharge Voltage V /cell | 1.75V | 1.70V | 1.60V |
|---------------------------------|------------|-------------------|------------|
| Discharge Current (A) | (A) ≤ 0.2C | 0.2C < (A) < 1.0C | (A) ≥ 1.0C |

Charge the batteries at least once every six months, if they are stored at 25°C .

Charging Method:

| | |
|------------------|--|
| Constant Voltage | -0.2Cx2h+14.4-14.7Vx24h, Max. Current 0.3C |
| Constant Current | -0.2Cx2h+0.1Cx12h |
| Fast | -0.2Cx2h+0.3Cx4h |

| Bolt | M5 | M6 | M8 |
|----------|-----------------------|------------------|-----------------------|
| Terminal | F3 F4 F13 F18 T25 T26 | F8 F11 F12-1 F15 | F5 F9 F10 F12 F14 F16 |
| Torque | 6~7N-m | 8~10N-m | 10~12N-m |

Maintenance & Cautions

| |
|---|
| Float Service: |
| ※ Every month, recommend inspection every battery voltage. |
| ※ Every three months, recommend equalization charge for one time. |
| Equalization charge method: |
| Discharge: 100% rate capacity discharge. |
| Charge: Max. current 0.3CA, constant voltage 14.4-14.7V charge 24h. |
| ※ Effect of temperature on float charge voltage: -3mV/°C/Cell. |
| ※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage. |